

## Rail Mounting Kit




- **Easy to use**  
Ergonomic design  
Easy to install and to inspect
- **Telescopic rod**  
Extendable to 4 meters (13.5 feet)
- **Flexible mounting bracket**  
Springloaded  
Withstands turbulent conditions
- **Flexibility**  
Same mounting kit for ITX and O2X sensors


## Telescopic fiberglass rod with two-piece PVC adapter



## Flexible mounting bracket



The Telescopic fiberglass rod can be mounted with the flexible mounting bracket on existing handrail or on a separate holder, diameter 32-50 mm (1 1/4" - 2") or square 28-42 mm (1 1/8" - 1 5/8")

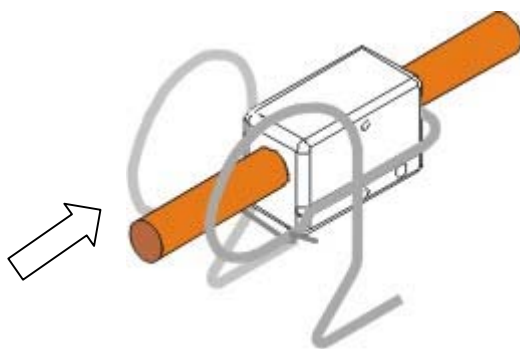

**Cerlic's product line** contains sensors for measuring and monitoring your process. Our instruments are used in municipal waste water & water treatment plants, industrial and pulp & paper process control. The development of our BB2 product line is the result of increasing demand for instrumentation that is reliable, accurate and durable.



P.O. Box 5084 SE-141 05 Huddinge Sweden  
Phone +46 8 501 694 00 Fax +46 8 501 694 29  
[www.cerlic.com](http://www.cerlic.com) e-mail [sales@cerlic.se](mailto:sales@cerlic.se)